



Screw Disconnect Terminal Blocks

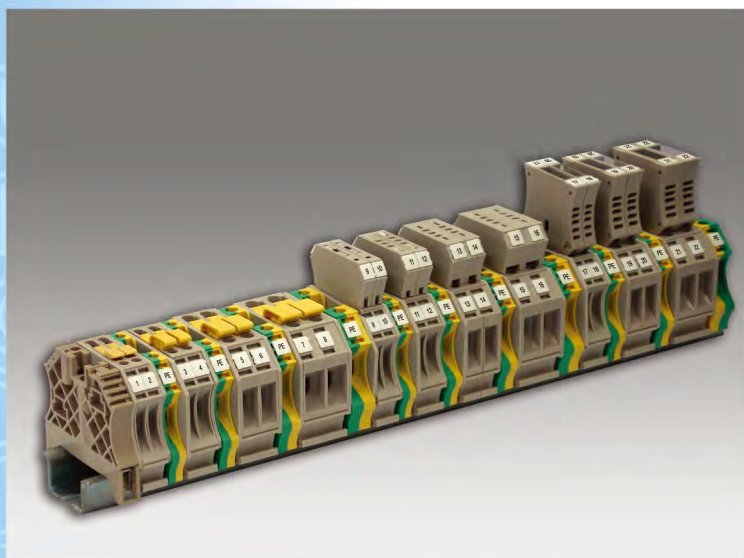

CTR 4SI

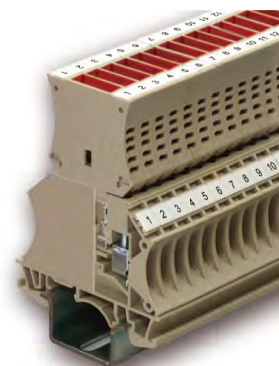

Features of Disconnect(Diode) Terminal Blocks (CTR2.5D/4D/6D/10D)


- Installing the diode plug easily and quickly on the terminal rails(Ease of fault finding).
- Various diode circuits are available for different application.
- Suitable for broad range of cross-section and types of wires.
- Wires can be connected without any special preparation.
- An excellent vibration proof protection against loosening.
- Stable and low contact resistances.
- Easy mounting and dismounting from the terminal rail.

分離型(內接二極體)接線座之特性 (CTR2.5D/4D/6D/10D)


- 二極體插頭安裝及更換容易(有利於故障診斷)
- 適用不同之二極體電路及應用類型
- 適合範圍寬廣的導線線徑
- 簡易的導線連接方式
- 優良的抗震防鬆設計
- 低且穩定的接觸電阻
- 接線座從軌道上安裝及拆卸容易

Specifications (產品規格)		4 mm ²	
Technical Data (技術參數)		Rated voltage/Rated current/Wire size	
UL		400 V / 10A/AWG 10-22	
CSA		400 V / 10A/AWG 10-22	
IEC		400 V/10 A/0.5~4mm ²	
Insulating impulse voltage withstand (額定衝擊電壓)		6 KV	
Torque (lb-in) (扭緊力矩)		6	
Clamping Screw (M) (螺絲)		M3	
Insulation stripping length(mm) (剝線長度)		10-12 mm	
Material/Available Color (材質顏色)		Beige	
Rail Dimensions (導軌尺寸)		T / W / H (mm)	
For TS35x7.5 		6 x 60 x 47.5 + 31.5(CSI4)	
For TS35x15 		6 x 60 x 55 + 31.5(CSI4)	
Accessories (附件)		Cat. No.	Qty.
End Bracket (終端擋板)		SEW35	50
		CEW35/2	50
End Plate (擋板)		CEP 1	50
Partition (擋板/隔片)		CEP 2	50
Comb Link (邊接式聯接件)		CQB 4/2	50
		CQB 4/3	50
		CQB 4/10	20
Marking Tags (標記號)		W6 W6Z W6K	500
		W8 W8Z W8K	400
Test plug (測試插頭)			
Socket (測試插孔)			
Diode Plug (二極體插頭)	+  -	CSD4	25
	-  +	CSD4	25
LED Fuse Type (顯示型保險絲插座) Insert		CSI4	25
Protection Cover (防觸蓋)			
Retaining Plates (扣板/中界板)			
Tool (工具)		DS3	


CTR 6



CTR 6D

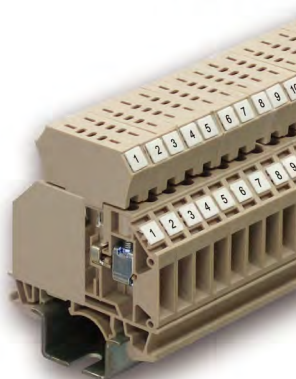

CTR 6SI

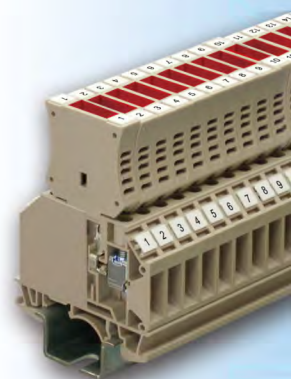

6 mm ²		6 mm ²		6 mm ²	
Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size		Rated voltage/Rated current/Wire size	
600 V/ 24A/AWG 12-22		600 V/ 3A/AWG 12-22		400 V/ 20A/AWG 8-20	
600 V/ 24A/AWG 12-22		600 V/ 3A/AWG 12-22		400 V/ 20A/AWG 8-20	
630 V/24 A/0.5~6mm ²		500 V/3 A/0.5~6mm ²		500 V/20 A/0.5~6mm ²	
8 KV		8 KV		8 KV	
14		14		14	
M4		M4		M4	
12-14 mm		12-14 mm		12-14 mm	
Beige		Beige		Beige	
T / W / H (mm)		T / W / H (mm)		T / W / H (mm)	
8 x 60 x 47.5		8 x 60 x 47.5 + 18(CSD6)		8 x 60 x 47.5 + 31.5(CSI6)	
8 x 60 x 55		8 x 60 x 55 + 18(CSD6)		8 x 60 x 55 + 31.5(CSI6)	
Cat. No.	Qty.	Cat. No.	Qty.	Cat. No.	Qty.
SEW35	50	SEW35	50	SEW35	50
CEW35/2	50	CEW35/2	50	CEW35/2	50
CEP 5	50	CEP 5	50	CEP 5	50
		CEP 2	50	CEP 2	50
CQB 6/2	50	CQB 6/2	50	CQB 6/2	50
CQB 6/3	50	CQB 6/3	50	CQB 6/3	50
CQB 6/10	20	CQB 6/10	20	CQB 6/10	20
W6 W6Z W6K	500	W6 W6Z W6K	500	W6 W6Z W6K	500
W8 W8Z W8K	400	W8 W8Z W8K	400	W8 W8Z W8K	400
TPS2.3 (Ø2.3)	20				
TPS4 (Ø4)	20				
TP2.3	50				
TP4	50				
CSD6	25	CSD6	25	CSD6	25
CSD6	25	CSD6	25	CSD6	25
CSI6	25	CSI6	25	CSI6	25
DP1	20	DP1	20		
AD1	50	AD2	50		
DS4		DS4		DS4	