


ME 140-508 Double level header



Pitch: 5.08mm(0.200inch)




SPECIFICATIONS

			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung	AC 300V	AC 250V
負載電流	Rated Current	Bemessungsstrom	16A	12A
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
焊針	Solder Pin	Lötstift	□ 1.0mm, Brass, Tin plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	φ1.5mm	

TABLE

Item No.	A(mm)	A(inch)
ME140-50804	14.7	0.579
ME140-50806	19.8	0.779
ME140-50808	24.9	0.979
ME140-50810	29.9	1.179
ME140-50812	35.0	1.379
ME140-50814	40.1	1.579
ME140-50816	45.2	1.779
ME140-50818	50.3	1.979
ME140-50820	55.3	2.179
ME140-50822	60.4	2.379
ME140-50824	65.5	2.579
ME140-50826	70.6	2.779
ME140-50828	75.7	2.979
ME140-50830	80.7	3.179
ME140-50832	85.8	3.379
ME140-50834	90.9	3.579
ME140-50836	96.0	3.779
ME140-50838	101.1	3.979
ME140-50840	106.1	4.179
ME140-50842	111.2	4.379
ME140-50844	116.3	4.579
ME140-50846	121.4	4.779
ME140-50848	126.5	4.979

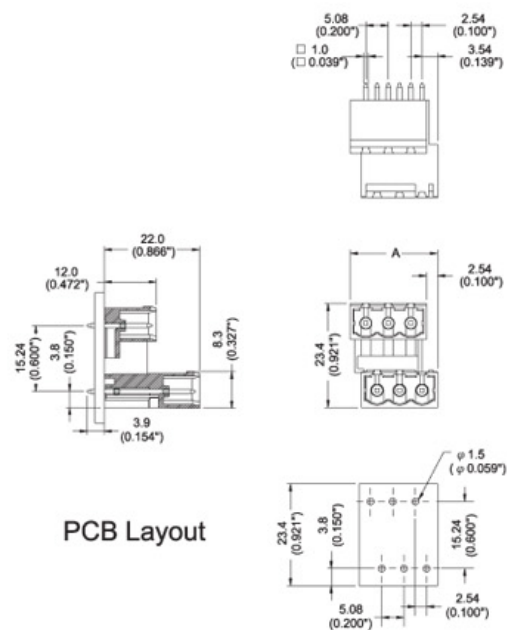

PCB Layout